


## Accuracy & Satisfaction



MEDIUM DUTY LATHE MACHINE



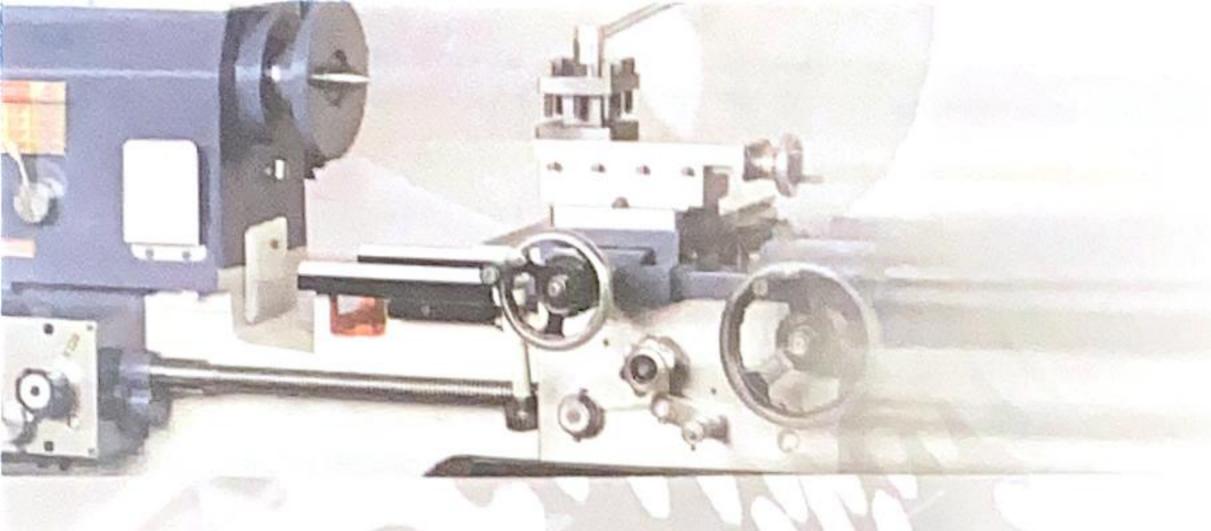

## MEDIUM DUTY MACHINES

	DR-1/228	DR-2/228	DR-3/228
BED			
Length of Bed	4' - 6" (1370mm)	5' - 3" (1600mm)	6' (1825mm)
Distance OFCenter Over Flat Bed Ways	230mm	230mm	230mm
Swing Over Bed	425mm	425mm	425mm
Swing Over Cross Slide	230mm	230mm	230mm
Swing in Gap	625mm	625mm	625mm
Bed Width	280mm 11"	280mm 11"	280mm 11"
Bed Type	2 V & 2 Flat	2 V & 2 Flat	2 V & 2 Flat
HEAD STOCK OR MAIN SPINDLE			
Spindle Nose (Threaded Type)	Dia 76mm	Dia 76mm	Dia 76mm
Spindle Bore	53mm 2 1/8"	53mm 2 1/8"	53mm 2 1/8"
Morse Taper in Spindle Sleeve	MT-4	MT-4	MT-4
Number of Spindle Speed	8	8	8
Range of Spindle Speed	35 to 500	35 to 500	35 to 500
TAIL STOCK			
Spindle Diameter	53mm (2 1/8")	53mm (2 1/8")	53mm (2 1/8")
Spindle Morse Taper	MT-4	MT-4	MT-4
Spindle Travel	165mm	165mm	165mm
THREADS - PITCH			
Metric - Pitch	13 (1 TO 6mm)	13 (1 TO 6mm)	13 (1 TO 6mm)
English - Inches	19 (2 TO 24TPI)	19 (2 TO 24TPI)	19 (2 TO 24TPI)
Lead Screw	Dia 32mm	Dia 32mm	Dia 32mm
FEEDS			
Longitadinal	0.05 to 1.25mm	0.05 to 1.25mm	0.05 to 1.25mm
Cross Slide	0.0007 to 0.22mm	0.0007 to 0.22mm	0.0007 to 0.22mn
ELECTRICAL GENERAL			
"V" Belt	1.5HP 1440RPM	1.5HP 1440RPM	1.5HP 1440RPM
Weight (Approx.)	В	В	В
Floor Space occurred in mm			
(Approx.) L x W x H	1675x540x1160	1975x540x1160	2050x540x1160

Note: Our extra model are Spindle hole 3 1/8" (79mm). Extra Ordinary Deluxe under counter are Medium Duty Spindle hole 53mm & 79mm.

